



DIN 912

Kuusiokoloruuvi
Hexagon socket head cap screw

ISO 4762

Винт с цилиндрической головкой (с внутренним шестигранником)
Sisekuuskantpolt

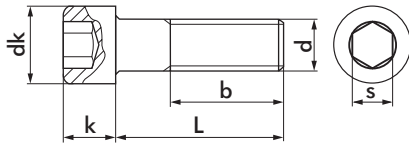

d	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M24	M30
b	18	20	22	24	28	32	36	40	44	48	52	60	72
dk (max)	5,5	7	8,5	10	13	16	18	21	24	27	30	36	45
k (max)	3	4	5	6	8	10	12	14	16	18	20	24	30
s	2,5	3	4	5	6	8	10	12	14	14	17	19	22

d	L(mm)	A4 1007	A4 80 10070	A2 4007	Zn 8.8 0084	St 12.9 0083
M24	40				▲	
	45	■	■			
	50	▲	▲		▲	▲
	55					■
	60	▲	▲		▲	▲
	70	▲	▲		▲	▲
	80	▲	▲		▲	▲
	90	▲	▲		▲	▲
	100	▲	▲		▲	▲
	110	■	■			▲
	120	■	■		▲	▲
	130				▲	■
	140				▲	■
	150				▲	▲
	160				▲	▲
	180				▲	▲
	200				▲	▲
	220					■
	240					■
	260				▲	▲
280				▲	▲	
300					■	
580					▲	
M30	50				▲	■
	60				▲	■
	70				▲	
	80				▲	■
	90				▲	▲
	100				▲	■
	110					■
	120				▲	▲
	130				▲	■
	140				▲	■
	150				■	■
	180					■
220				▲	▲	
240				▲		
260				▲	■	

d	L(mm)	A4 1007	A4 80 10070	A2 4007	Zn 8.8 0084	St 12.9 0083
M36	80				■	
	90				■	
	100				▲	
	120				▲	
	140				▲	
	160				▲	
	180				▲	
	220				▲	
M42	80				■	
	100				■	
	120				▲	
	140				■	
	150				■	
	170				■	
	220				■	
	240				■	
280				▲		
460				▲		

© Ferrometal 08/2015